


TASK & DOWN LIGHTS

AMBIELLA IND SQUARE

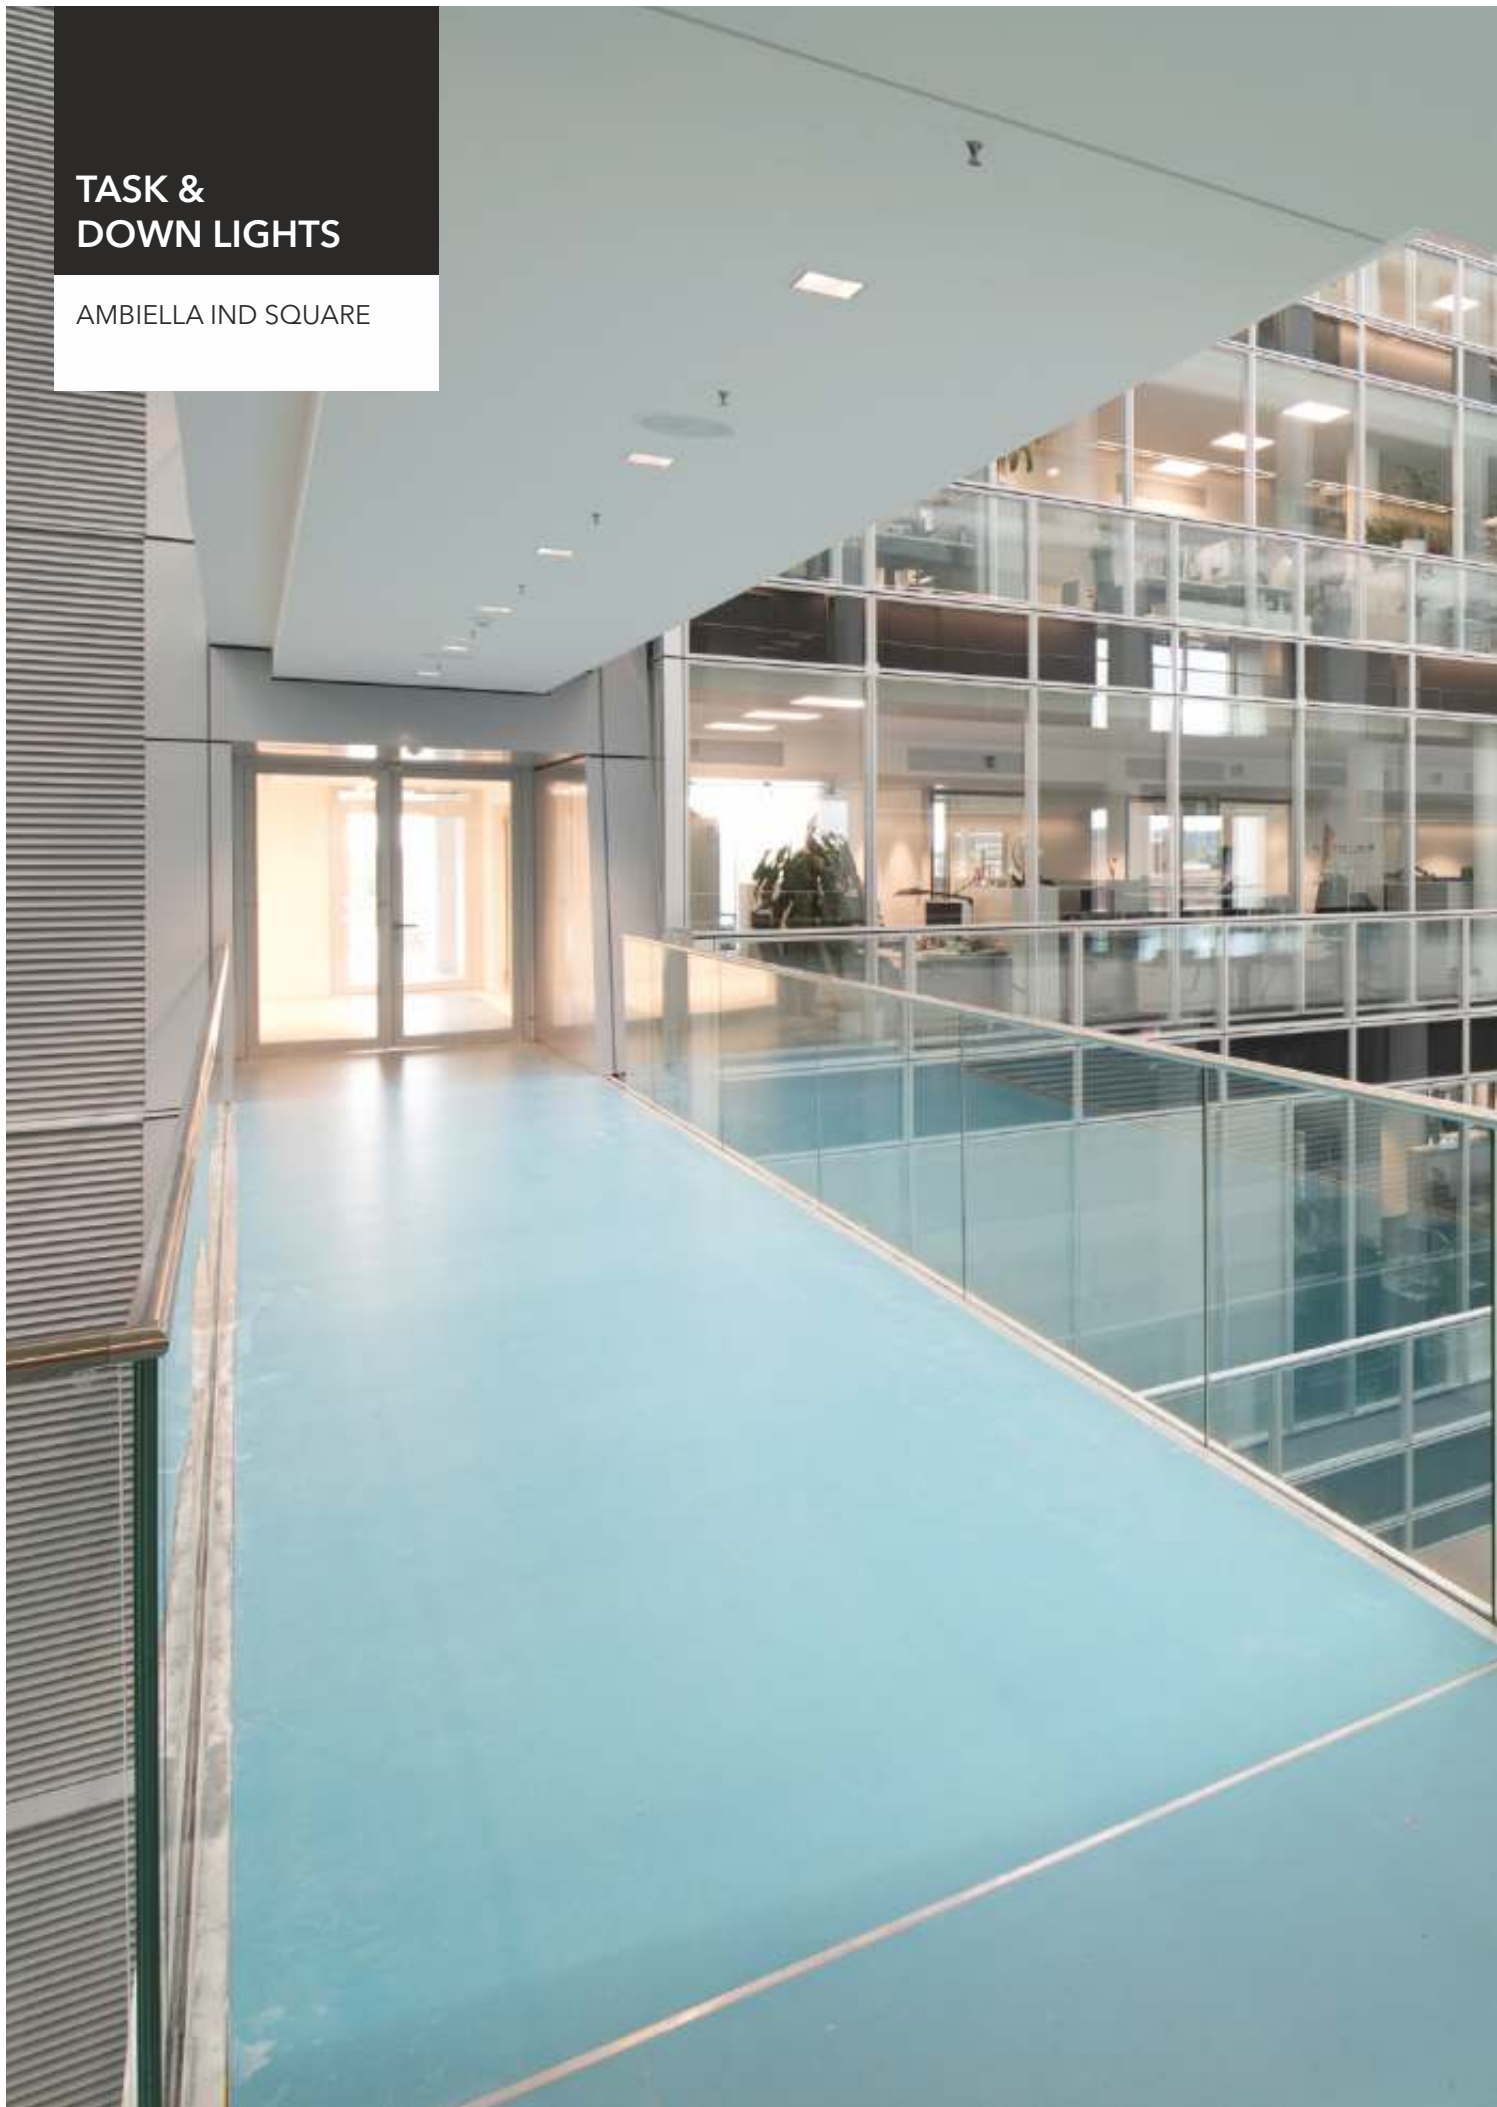

Ambiella IND Square G3 LED 10 W

Luminaire type

Compact LED downlight with square construction.

Applications

Offices, Corridors, Foyers, Conference rooms,
Retail areas, waiting zones.

Mounting methods

Recessed downlight for cut-out ceiling openings. Tool-free ceiling installation via rapid mounting springs. Housing dimensions 135x135x48mm Cut-out opening 120 mm x 120 mm, Ceiling Clearance 50 mm.

Optical system

Harmonious light effect due to homogeneously illuminated light emission. Cover of translucent PMMA.

LED system

Luminaire luminous flux 900 lm Connected load 10 Watt, Luminous efficiency of luminaire 90 lm/W. Colour rendering index Ra > 80, Service life 50000 operating hours.

Luminaire body


Ceiling rim and heat sink of die-cast Aluminum. Luminaire body and heat sink form a compact unit.

Electrical connection

Mains connection is achieved via connection cable.

Electrical version

Electronic Switchable/Analog/DALI.
POE compatible version on request.

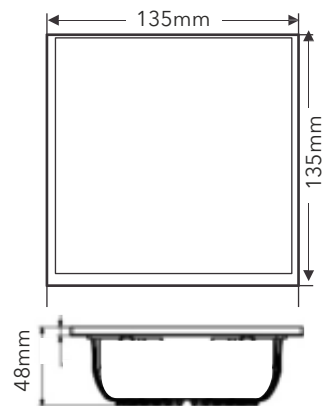


VARIANTS

10152613	Ambiella IND Square G3 LED 900-840 ET	10W, Electronic Switchable, 4000K
10152616	Ambiella IND Square G3 LED 900-857 ET	10W, Electronic Switchable, 5700K
10152615	Ambiella IND Square G3 LED 900-840 ETD	10W, Analog Dimmable, 4000K
10152618	Ambiella IND Square G3 LED 900-857 ETD	10W, Analog Dimmable, 5700K
10152614	Ambiella IND Square G3 LED 900-840 ETDD	10W, DALI Dimmable, 4000K
10152617	Ambiella IND Square G3 LED 900-857 ETDD	10W, DALI Dimmable, 5700K

TASK & DOWN LIGHTS

AMBIELLA IND SQUARE

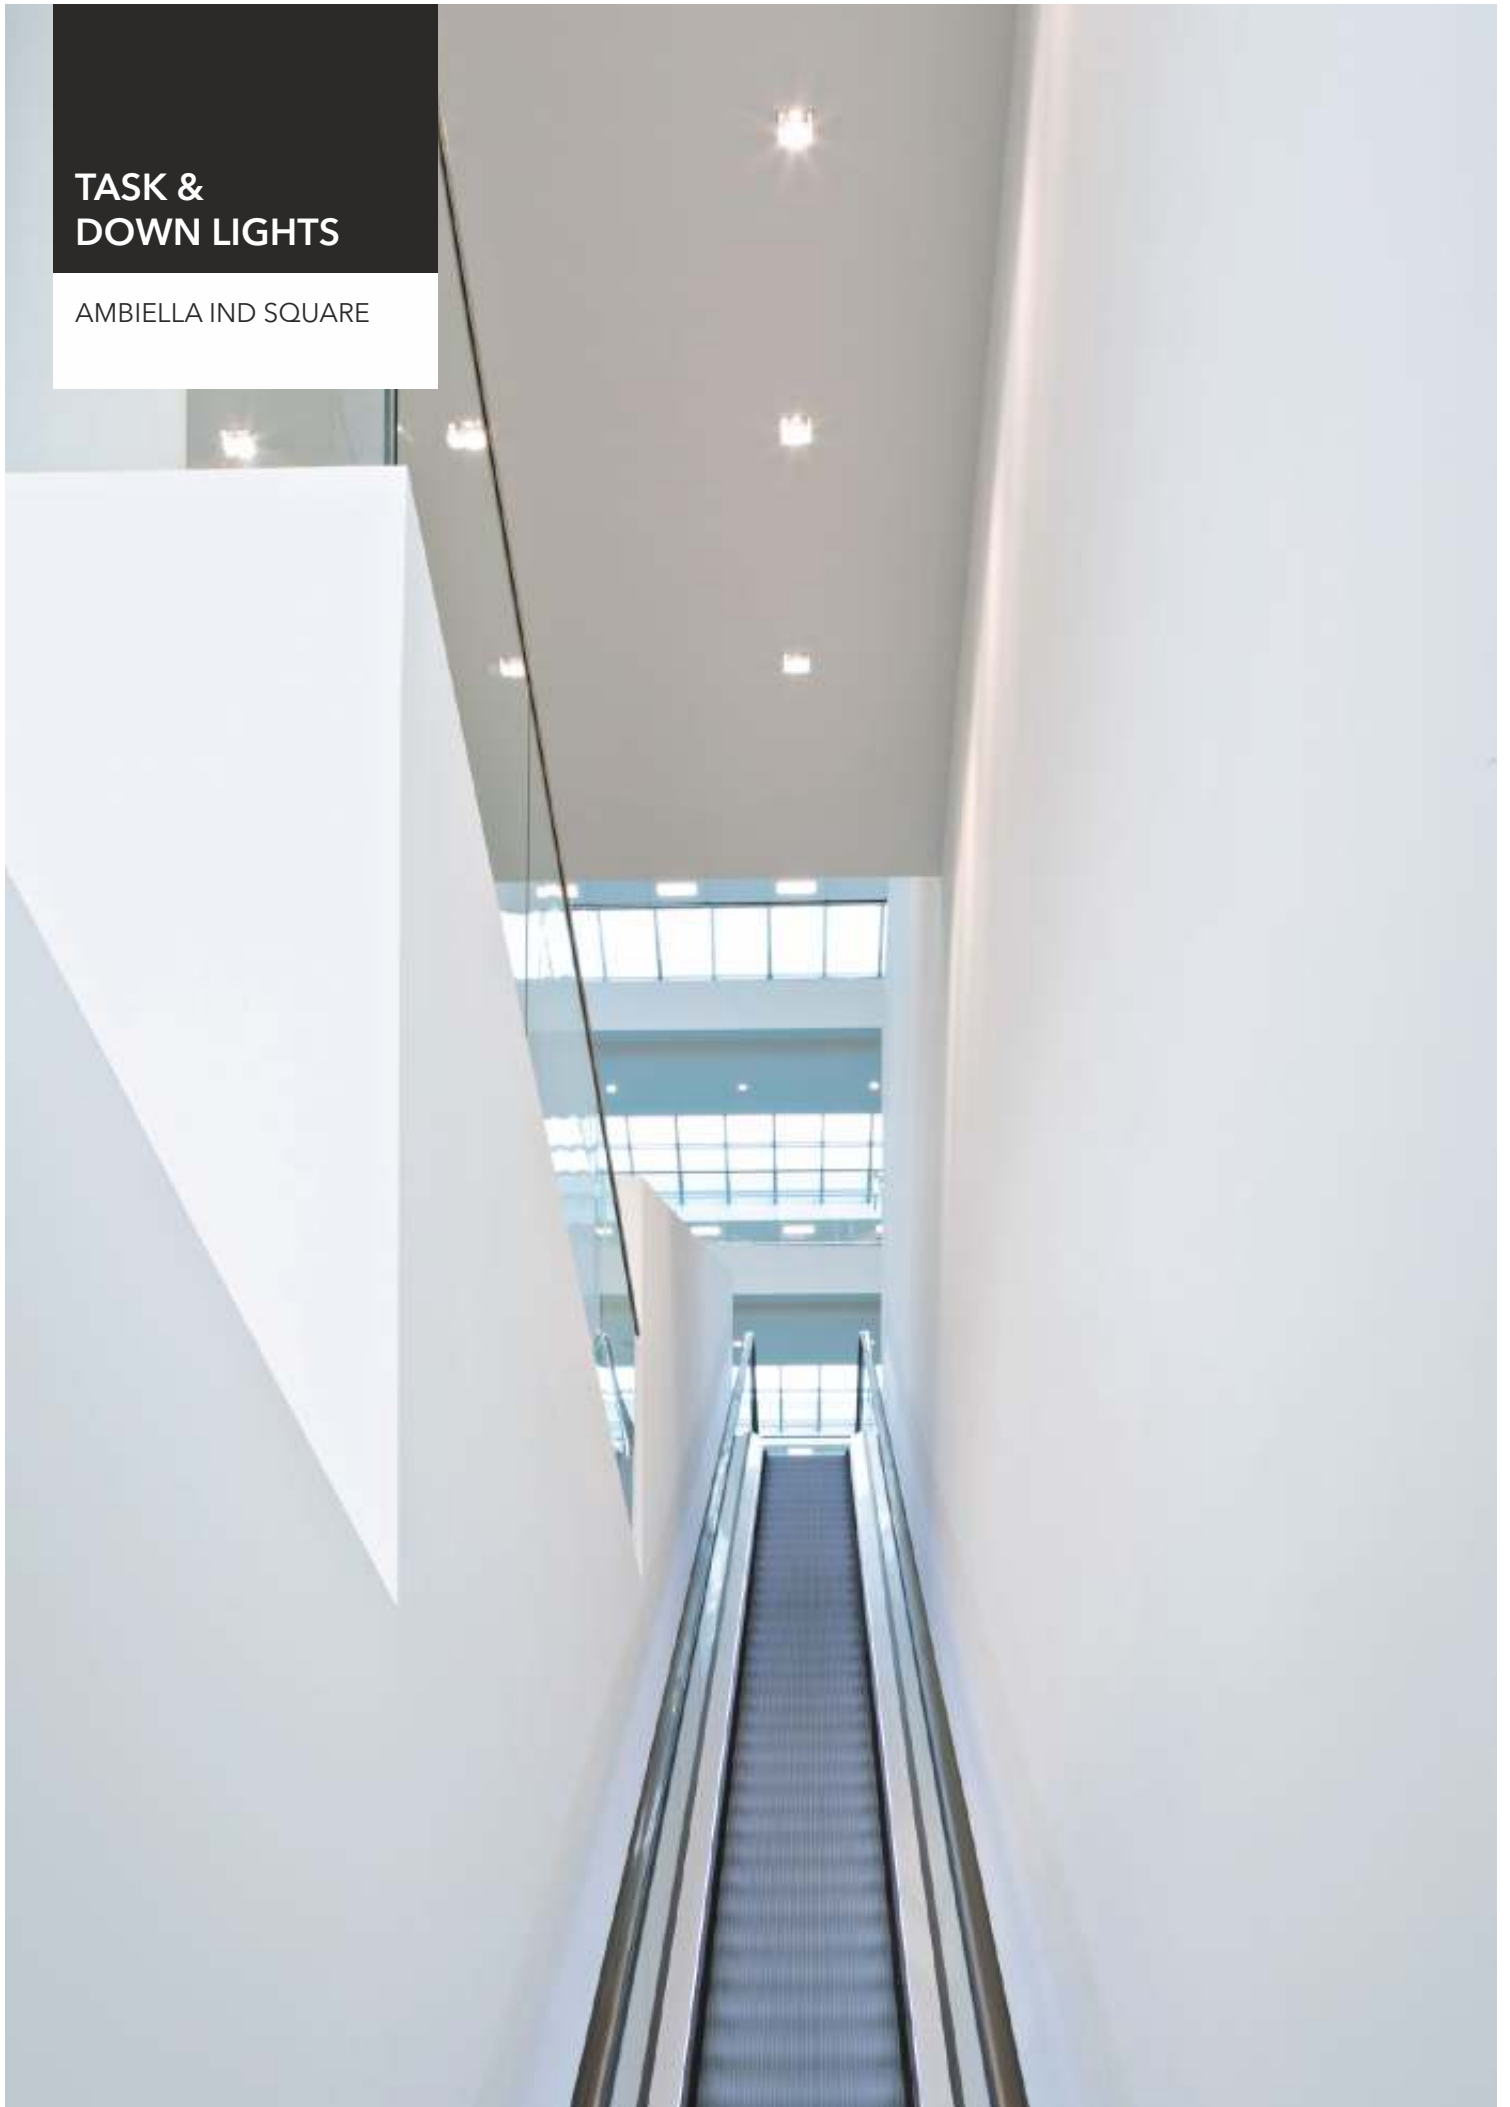

Ambiella IND Square G3 LED 12 W

Luminaire type

Compact LED downlight with square construction.

Applications

Offices, Corridors, Foyers, Conference rooms,
Retail areas, waiting zones.

Mounting methods

Recessed downlight for cut-out ceiling openings. Tool-free ceiling installation via rapid mounting springs. Housing dimensions 135x135x48mm Cut-out opening 120 mm x 120 mm, Ceiling Clearance 50 mm.

Optical system

Harmonious light effect due to homogeneously illuminated light emission. Cover of translucent PMMA.

LED system

Luminaire luminous flux 1080 lm Connected load 12 Watt, Luminous efficiency of luminaire 90 lm/W. Colour rendering index Ra > 80, Service life 50000 operating hours.

Luminaire body


Ceiling rim and heat sink of die-cast Aluminum. Luminaire body and heat sink form a compact unit.

Electrical connection

Mains connection is achieved via connection cable.

Electrical version

Electronic Switchable/Analog/DALI.
POE compatible version on request.

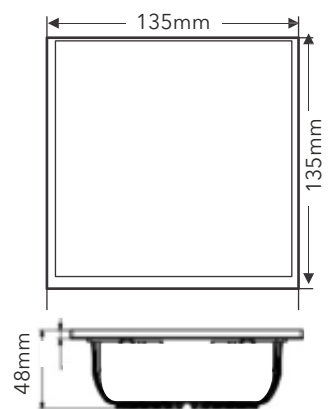

VARIANTS

10152619	Ambiella IND Square G3 LED 1020-840 ET	12 W, Electronic Switchable, 4000K
10152622	Ambiella IND Square G3 LED 1020-857 ET	12 W, Electronic Switchable, 5700K
10152621	Ambiella IND Square G3 LED 1020-840 ETD	12 W, Analog Dimmable, 4000K
10152624	Ambiella IND Square G3 LED 1020-857 ETD	12 W, Analog Dimmable, 5700K
10152620	Ambiella IND Square G3 LED 1020-840 ETDD	12 W, DALI Dimmable, 4000K
10152623	Ambiella IND Square G3 LED 1020-857 ETDD	12 W, DALI Dimmable, 5700K

TASK & DOWN LIGHTS

AMBIELLA IND SQUARE



Ambiella IND Square G3 LED 15 W

Luminaire type

Compact LED downlight with square construction.

Applications

Offices, Corridors, Foyers, Conference rooms,
Retail areas, waiting zones.

Mounting methods

Recessed downlight for cut-out ceiling openings. Tool-free ceiling installation via rapid mounting springs. Housing dimensions 160x160x52mm Cut-out opening 150mm x 150mm, Ceiling Clearance 55 mm.

Optical system

Harmonious light effect due to homogeneously illuminated light emission. Cover of translucent PMMA.

LED system

Luminaire luminous flux 1350 lm Connected load 15 Watt, Luminous efficiency of luminaire 90 lm/W. Colour rendering index Ra > 80, Service life 50000 operating hours.

Luminaire body


Ceiling rim and heat sink of die-cast Aluminum. Luminaire body and heat sink form a compact unit.

Electrical connection

Mains connection is achieved via connection cable.

Electrical version

Electronic Switchable/Analog/DALI.
POE compatible version on request.

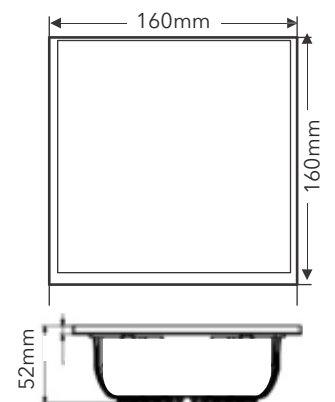

VARIANTS

10152625	Ambiella IND Square G3 LED 1275-840 ET	15W Electronic Switchable, 4000K
10152628	Ambiella IND Square G3 LED 1275-857 ET	15W Electronic Switchable, 5700K
10152627	Ambiella IND Square G3 LED 1275-840 ETD	15W Analog Dimmable, 4000K
10152630	Ambiella IND Square G3 LED 1275-857 ETD	15W Analog Dimmable, 5700K
10152626	Ambiella IND Square G3 LED 1275-840 ETDD	15W DALI Dimmable, 4000K
10152629	Ambiella IND Square G3 LED 1275-857 ETDD	15W DALI Dimmable, 5700K