


**TASK &  
DOWN LIGHTS**

ENTERIO D IND

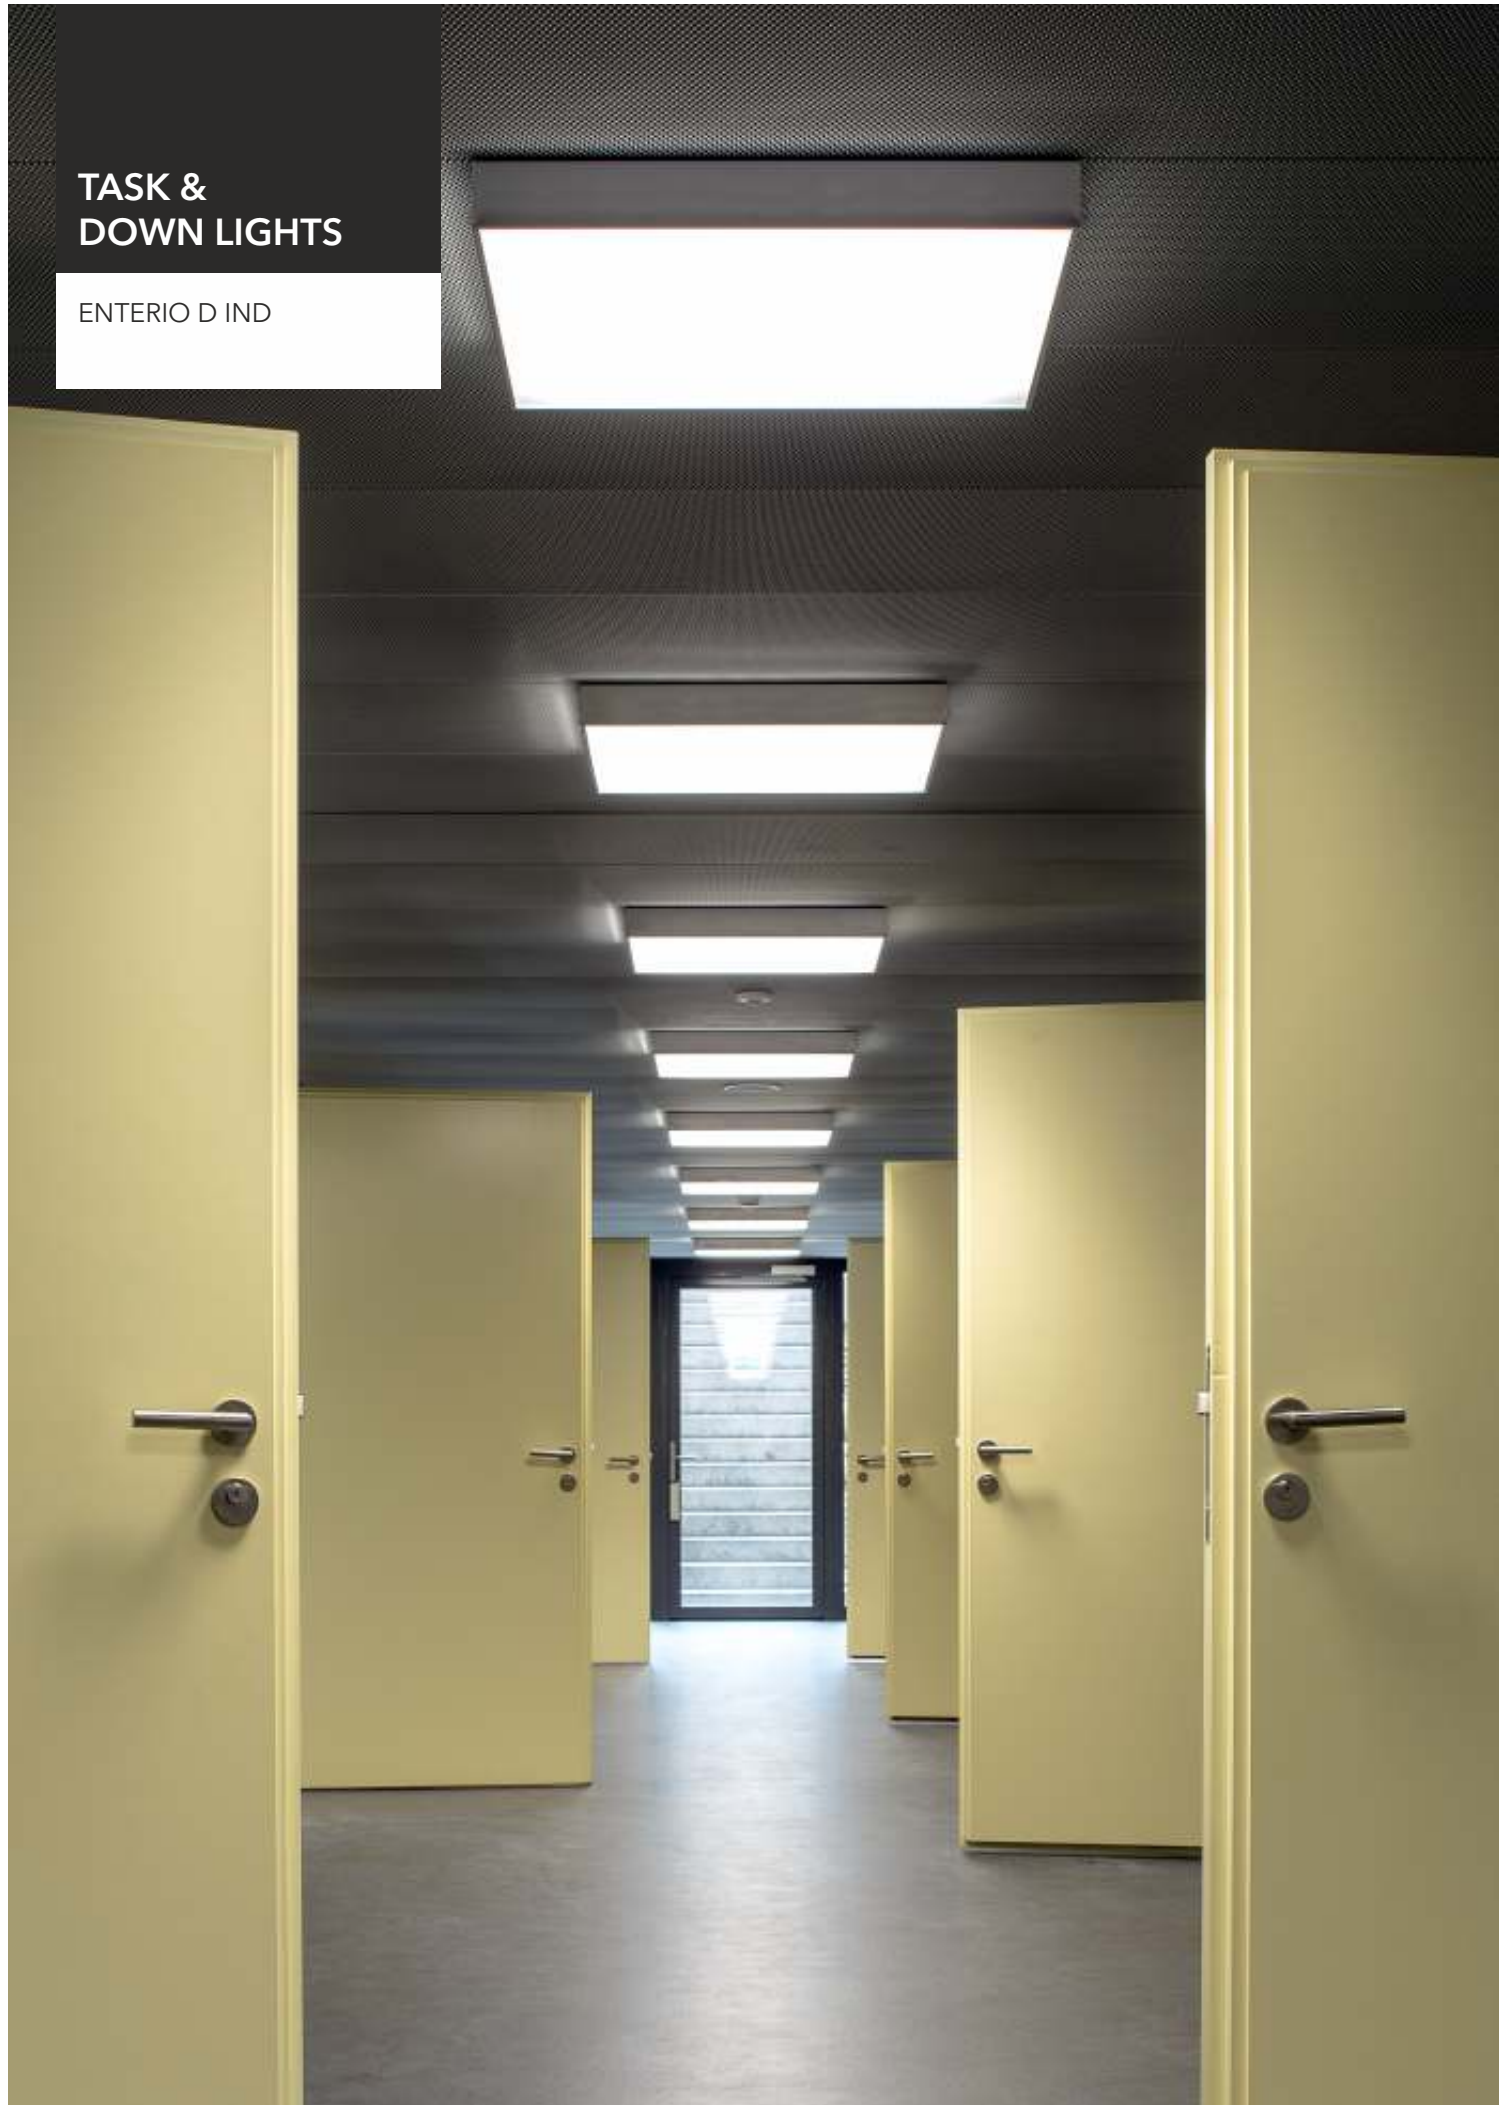

# Enterio D IND LED 36 W

### Luminaire type

Surface mounted LED luminaire with PMMA Diffuser.

### Applications

Offices, Corridors, Foyers, Conference rooms, Retail areas, waiting zones.

### Mounting methods

For mounting to exposed ceilings.

### Optical system

Harmonious light effect due to homogeneously illuminated light emission. Cover of translucent PMMA.

### LED system



Luminaries Luminous Flux 3600 Lm, connected Load 36W with white color temperature 5700 K, Colour rendering index Ra > 80. Service life 50,000 operating hours.

### Luminaire body

CRCA luminaire body, white coated.

### Electrical version

With electronic switchable / DALI  
POE compatible version on request

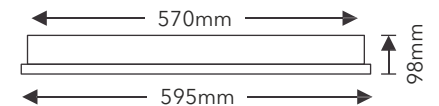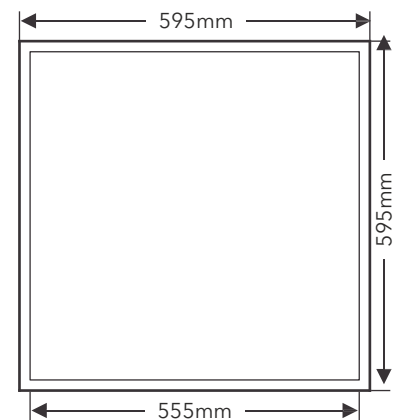

### VARIANTS

10166528	Enterio D IND LED3600-840 ET	36 W, Electronic Switchable, 4000K
10166529	Enterio D IND LED3600-857 ET	36 W, Electronic switchable, 5700K
10166530	Enterio D IND LED3600-840 ETDD	36 W, DALI Dimmable, 4000K
10166531	Enterio D IND LED3600-857 ETDD	36 W, DALI Dimmable, 5700K