

**TASK &  
DOWN LIGHTS**

TROFFER X



# Troffer X

## Luminaire type

Innovative luminaire with backlit Troffer X-Panel for recessed applications adopts integrated design, and integral firm structure creating stunning light effects in ceilings.

## Applications

Offices, Banks, Hospitality, Hospitals, Corridors, Foyers, Conference rooms, Retail areas, waiting zones.

## Mounting types

For system ceilings with exposed grids, false ceilings.  
 Dimensions (L x W x H) 595 mm x 595 mm x 25 mm;  
 Cut Out Dimensions (L x W) 570 mm x 570 mm

## Optical system

Highly efficient Conical De-glaring Micro-prisms, UGR <19. "X" shape light emission.

## LED system

Super bright LED as light source, which is stable, long life and no UV & IR emission. Luminaire luminous flux 3500 lm, Connected load 28 Watt, Colour Temperatures 3000 K/ 4000 K/ 5700 K, Luminous efficiency of luminaire 125 lm/W. Colour rendering index Ra > 80. Service life 50,000 operating hours.

## Luminaire body


Powder Coated CRCA, white

## Electrical connection

Mains connection is achieved via connection cable.

## Electrical version

Electronic Switchable/Analog/DALI.  
 POE compatible version on request.

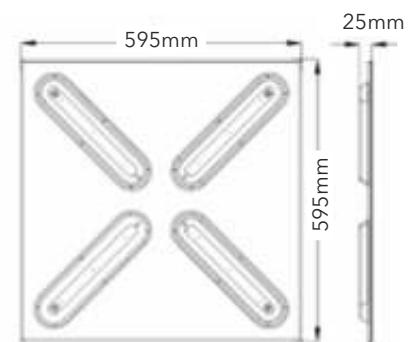

## VARIANTS

10159918	Troffer X Panel 28W-WW ET01	28 W, Electronic Switchable, 3500Lm, 3000K
10159919	Troffer X Panel 28W-NW ET01	28 W, Electronic Switchable, 3500Lm, 4000K
10159920	Troffer X Panel 28W-CW ET01	28 W, Electronic Switchable, 3500Lm, 5700K
10159921	Troffer X Panel 28W-WW ETDD01	28 W, DALI Dimmable, 3500Lm, 3000K
10159922	Troffer X Panel 28W-NW ETDD01	28 W, DALI Dimmable, 3500Lm, 4000K
10159923	Troffer X Panel 28W-CW ETDD01	28 W, DALI Dimmable, 3500Lm, 5700K