

INDUSTRIAL AND WEATHER PROOF

X TREMA
WEATHER PROOF



X Trema - Weather Proof

Luminaire type

Weather proof battens with IP 65 ratings for industrial and other applications in exposed climates requiring higher degree of ingress protection. .

Applications

Industry, Warehouses, Airports, Car Parks, Kitchens, Cold Rooms and Canopied outdoor areas

Mounting methods

Suspended / Surface Mounted
600 mm x 50 mm x 70mm / 1200mm x 50 mm x 70 mm

Optical system

Extruded Polycarbonate Housing with Opal Polycarbonate Vapour Proof Diffuser.

LED system

Best in class LEDs, with Luminaire luminous flux 1800 lm / 3600 lm, connected load 18 W / 36 W, luminous efficiency of luminaire 100 lm/W. Light Colour neutral white, Colour temperature 3000/ 4000/ 6000 K, Colour rendering index Ra > 80. Operating Temperature range - 20° C to 50° C. IP 65, Impact Protection IK- 10, Service Life of 50,000 Hours, Input Voltage 230 VAC, 50/60 Hz

Luminaire body


Extruded Polycarbonate, Vapour Proof, Anti Corrosive, White / Grey

Electrical connection

Mains connection is achieved via connection cable.

Electrical version

With Electronic Switchable
POE compatible version on request.

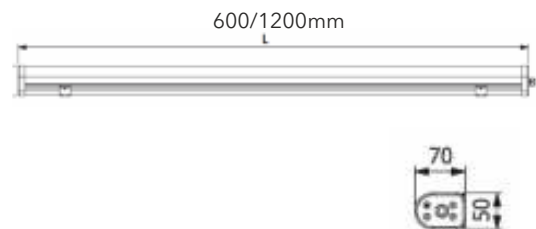

VARIANTS

10163663	TRL OTA 1800-830 ET	18 W Batten, 3000 K, Electronic Switchable
10163661	TRL OTA 1800-840 ET	18 W Batten, 4000 K, Electronic Switchable
10163662	TRL OTA 1800-860 ET	18 W Batten, 5700 K, Electronic Switchable
10163660	TRL OTA 3600-830 ET	36 W Batten, 3000 K, Electronic Switchable
10163658	TRL OTA 3600-840 ET	36 W Batten, 4000 K, Electronic Switchable
10163659	TRL OTA 3600-860 ET	36 W Batten, 5700 K, Electronic Switchable