




## DOPPIO LED AS (asymmetrically)

Type of luminaire	Corridor zone light
Application areas	shelf- and corridor lighting
Mounting	2 – phase track adapter
Lighting technology	LED
Reflector	asymmetrically
Pan/tilt range	reflector pivotable about $\pm 5^\circ$
Lumen category	4500 lm
Light colour white	4000K
Cooling	passive
Supply unit	integrated
Luminaire colour	RAL 9016 traffic white
Surface	structure powder coated
Nominal voltage	120 V, 60 Hz
Length	407 mm
Width	139 mm
Height	190 mm
Weight	approx. 4,9 kg

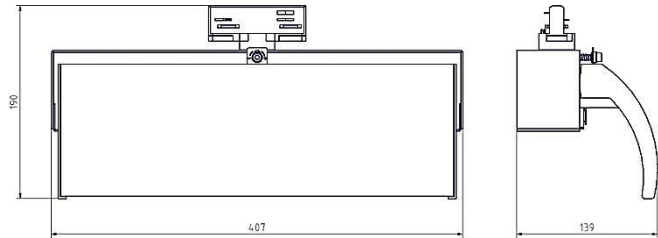

Certification marks



Reference Number	Reference	Net luminous flux	System Performance
50167063	DOPPIO 2P AS LED4500-840 A65 US 01	4080 lm	33 W