



Wraparound LED IP 66, 4000 lm

DESCRIPTION:


- Fully Enclosed Gasketed LED Luminaire
- LED luminaire for use in refrigeration and vapor tight applications
- IP65 / IP66 / IP67 Rated Enclosure
- Stainless steel straps for V-hook, chain, cable, or ceiling mount
- High impact acrylic lineal ribbed frosted lens
- 0-10V dimming driver standard, other dimming types available
- Controls and sensors available for your application
- Wireless control options (Lutron, EnOcean, ZigBee, etc.)
- Supports California Title 24 Compliance
- Mounting accessories upon request



SPECIFICATIONS:

- **TYPE:** Surface mounted, fully enclosed and gasketed LED luminaire, for installation in damp or wet locations as specified.
- **CONSTRUCTION:** Fiberglass housing, 22 ga. cold rolled steel internal snap-on gear-tray/cover with safety strap attached.
- **FINISH:** Gear Tray- Baked white polyester finish, minimum reflectance 86%. (Powder coated finish available.)
- **OPTICS:** High impact acrylic lens standard, lineal ribbed lens design. Lens secured to fiberglass housing by polycarbonate latches, stainless steel latches available.
- **LED SYSTEM:** High efficiency drivers coupled with long-life LEDs.
- **WIRING:** Universal voltage 120V through 277V.
- **LISTING:** U. L. Listed. Suitable for damp locations.
- **LUMEN OUTPUT:** 4000lm
- **COLOR TEMPERATURE:** 4000K

DIMENSIONS:

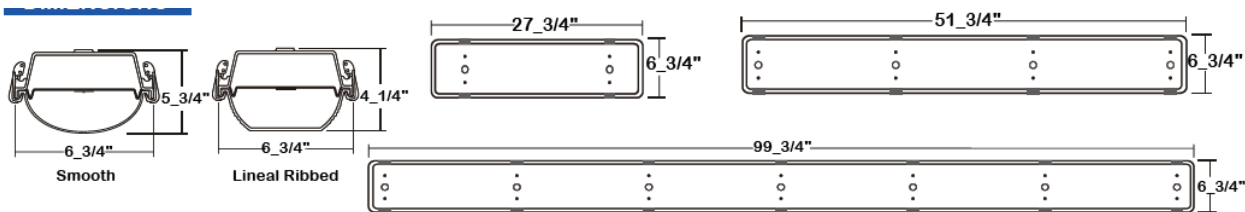

Reference Number	Reference	Area
50169707	WRAPAROUND LED 4000 840 US	Warehouse/ Secondary rooms

